

MAJAR



L'accessoire essentiel

REVERSIBLE PLOUGH

Ref.		Working width	Weight	HP
------	--	---------------	--------	----

■ Share body and mouldboard removable, mouldboard extension

CBR066	Without spoiler	6"	21	4/6
CBR066AC	With –	6"	22	4/6
CBR178	Without –	7"	29	6/8
CBR178AC	With –	7"	30	6/8
CBR289	Without –	8"	31	8/10
CBR289AC	With –	8"	32	8/10

Specific depth control



CBR178 AC + ZCBR



Handle



Depth control



Reversal pedal



Mouldboard extension

Tools for Tiller Range



MEUROPASOC

PLOUGH WITH REVERSIBLE BLADES

Ref.	Working width	Offset	Weight	HP
------	---------------	--------	--------	----

■ folding blade
5 ploughing positions

MEUROPASOC	6"	60 cm	20	4/8
EUROPASOC	8"	60 cm	28	6/12
EUROPAPAIN	8"	60 cm	28	6/12

Adjustment by screw
Offset right and left by notches



QQT178 + CDCQT

QUARTER TURN PLOUGH

Ref.	Working width	Weight	HP
------	---------------	--------	----

■ Share body and mouldboard removable, mouldboard extension

QQT066AC	with " 6"	23	4/6
QQT178AC	with " 7"	31	6/10

Specific depth control height adjustment



CSM066AC + ZCSM + LIAISON

SIMPLE MONOSHARE PLOUGH

Ref.	Working width	Weight	HP
------	---------------	--------	----


■ Share body and mouldboard removable, mouldboard extension

CSM066	Without spoiler 6"	13	3/5
CSM066AC	With " 6"	14	3/5
CSM178	Without " 7"	15	5/10
CSM178AC	With " 7"	16	5/10

Depth control

MAJAR

L'accessoire essentiel

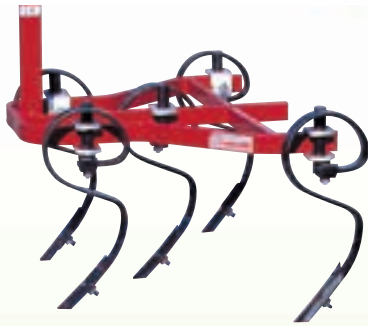

CF5S supple tines



C5R stiff tines



CP5C chisel tines

CULTIVATORS


Ref.	Tines	Working width	Weight	HP
Fix Cultivator. Rod 40 x 14				
CF5C	5 x chisel	70	18	5/8
CF5R	5 x stiff	70	18	5/8
CF5S	5 x supple	70	18	5/8

Ref.	Tines	Working width	Weight	HP
Reinforced extensible cultivator. Rod 40 x 14				
C5C	5 x chisel	30/60	23	5/8
C5R	5 x stiff	30/60	23	5/8
C5S	5 x supple	30/60	23	5/8
C7C	7 x chisel	35/90	25	8/12
C7R	7 x stiff	35/90	25	8/12
C7S	7 x supple	35/90	25	8/12


Ref.	Tines	Working width	Weight	HP
Professional cultivator on parallelogram Rod 40 x 14				
CP5C	5 x chisel	30/75	22	5/8
CP5R	5 x stiff	30/75	22	5/8
CP7C	7 x chisel	40/120	27	8/12
CP7R	7 x stiff	40/120	27	8/12



B5D

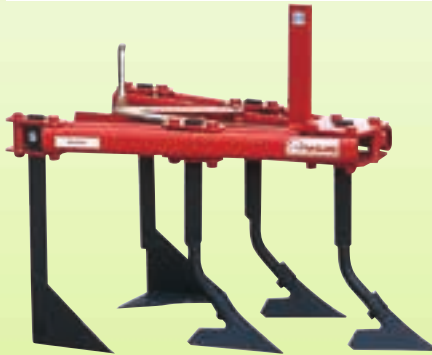

BP5D

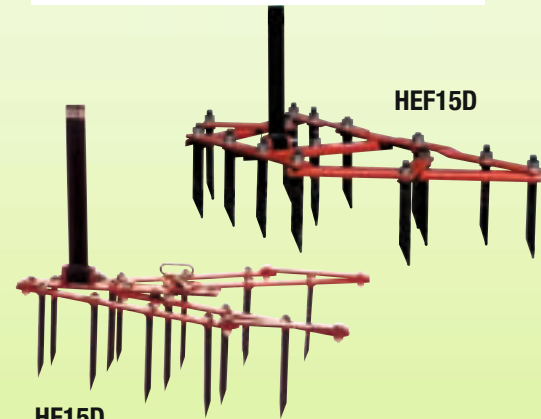

HEF15D

HOE

Ref.	Tines	Working width	Weight	HP
Reinforced extensible hoe. Rod 40 x 14				
B3D	1 duck foot share + 2 wing shares	30/60	19	4/6
B5D	3 duck foot shares + 2 wing shares	30/60	22	5/8
B7D	5 duck foot shares + 2 wing shares	40/90	24	8/12

Ref.	Tines	Working width	Weight	HP
Professional hoe on parallelogram. Rod 40 x 14				
BP5D	3 duck foot shares + 2 wing shares	30/75	22	5/8
BP7D	5 duck foot shares + 2 wing shares	40/120	27	8/12

HARROW

Ref.	Working width	Weight	HP
extensible harrow. Oscillating frame. Rod 40 x 14			
HE15D	55/100	13	4/12
HEF15D	110/125	30	6/16

15 interchangeable tines.



BUTOR

BUT1

RIDGER

Ref.	Working width	Weight	HP
Ridgers with mouldboard and counterfoil adjustable			
BUT1	19/41	5	4/7
BUT2	44/57	7	6/12

Ridgers with fixed mouldboard and counterfoil			
BUTOR	Tige Ø 22	25	4 3/5



BP02BR

ROD TOOL CARRIER

Ref.	Working width	Weight
Rod Tool Carrier. Rod 40 x 14		
BP02BR	85	11

2 fixation flanges to adapt : 2 ridgers, 2 cultivators or 2 potato diggers




APMOTC

APMOTC2

POTATO DIGGER

Ref.	Width	Weight	HP
potato digger. Rod 40 x 14			
APMOTC	23/47	8	5/10
APMOTC2	17/44	11	5/14

Working depth : 10 cm

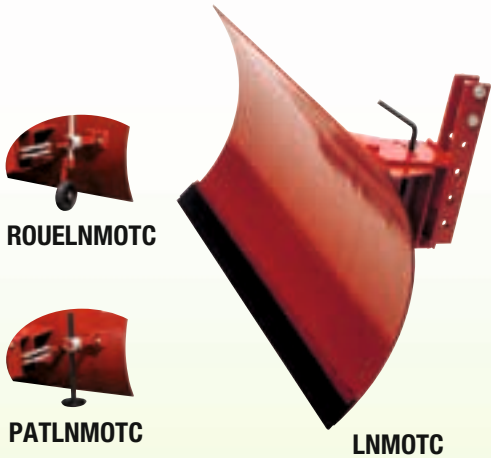

ROUELNMOTC

PATLNMOTC

LNMOTC

GRADER BLADE / SNOW PLOUGH

Ref.	Working width	Weight	HP
LNMOTC85	85	25	6/12
LNMOTC100	100	28	8/12

Connection : specify the type of tiller range
Options : Wheels or bases for depth control



RM3EMD



RM3E

MRM




ROLLS / HUBS

Ref.	Working width	Ø	Weight
■ Rolls and pairs of hubs for tiller range			
RM3EMD	105	28 cm	30
RM3E	105	28 cm	35

■ specific hubs

Ø 20, 25, 28, 30, or hexagon 23, 26

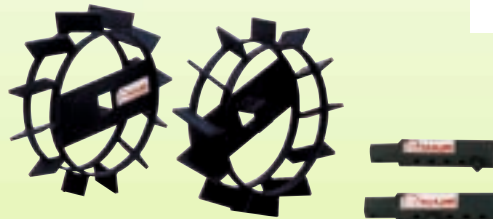

R355

MSPE

IRON WHEEL / HUB

■ R260 - R315 - R355 - R400 - R520 - R600

Weight 7 - 16 kg. Stable, adherent, reversible
Track adjustable. Easy assembly

■ specific hub

Ø 20, 25, 28, 30, or hexagon 23, 26

ACCESSORIES / OPTIONS TILLER RANGE TOOLS



■ skimmers and/or pair of skimmers : fixation on frame by flange



■ Coulter and/or pair of coulters : fixation on frame by flange



■ Transport wheel CBR : fixation on return pedal



■ depth control wheel cultivator : Fixation on frame by flange



■ connection : specify brand and type of tiller range



■ front wheel : for Honda and/or Kubota



■ clevis connection without guide or inclined



■ depth control with clevis connection



■ depth control soldered connection



■ Ridger rod right or offset



■ clevis connection for universal linkage



■ tiller range lifting



RM0400 + 081781



RM0600 + 582183



RM0800 + 081781

TRAILERS


Braked – parking brake – tipping – reflector signs
– adjustable comfort seat – delivered without connection

Ref	Payload	Wheels
■ Monobloc 120 x 100 (122 overall) x 40 cm		
RM0400	500 Kg	16-6,50-8
pivoting back door removable Option: mesh extension panel 120 x 100 x 50 cm		

Ref	Payload	Wheels
■ Plateform 150 x 100 (150 overall) x 28 cm		
RM0600	600 Kg	16 x 6,50-8
Sideboard and back hinged and removable Front buffer removable		

Ref	Payload	Wheels
■ Plateform 200 x 120 (122 overall) x 35 cm		
RM0800	800 Kg	600 x 9-10 plis
Hinged and removable sideboards Option : mesh extension panel		

Linking parts



081781

For tiller range with drawbar load height 74 or 95 and a pin Ø16 : **081781** - KUBOTA TF100 and STAUB 6000-7000 Ø16 - H94/74 : **582182** - STAUB PPX et 9500D Ø25 - H90 : **582183** - STAUB CHALLENGER Ø18,5 - H72 : **582184** - GOLDONI BINGO, JOLLY ET 581 Ø19,5 - H74 : **582185** - BOUYER 223 Ø22,5 - H60 : **582186** - GOLDONI 140 Spécial Lux DE and FORT Minitigre and Supertigre Ø22,5 - H78 : **582187** - GRILLO G55-G85-107 Ø14,5 - H42 : **582246**

THE ACCESSORIES FOR TILLER RANGES

Ref.	Weight
■ potato diggers 8 tines	
IMAPT8D	5
Rod 35 x 12	



Ref.	Weight
■ fixed cultivator 5 chisel tines	
IMCF5C	9
Working width 60 cm Rod 35 x 12	



Ref.	Weight
■ fixed harrow 9 tines	
IMHEF9D	7
Working width 62 cm Rod 35 x 12 Delivered disassembled	

Ref.	Weight
■ adjustable ridger with fixed counterfoil	
IMBUT1	5
Working width 19 – 35 cm Rod 35 x 12 soldered	



THE ACCESSORIES FOR MOTOR HOE

Ref.	Weight
■ potato digger 6 tines	
IMAPT6D	4
Rod 35 x 12	



Ref.	Weight
■ Fixed cultivator 3 chisel tines	
IMCF3C	6
Working width 38 cm – Rod 35 x 12	



Ref.	Weight
■ Fixed harrow 6 tines	
IMHEF6D	4
Working width 42 cdm – Rod 35 x 12	



Ref.	Weight
■ Fixe ridger	
IMBUTO	3
Working width 25 cm Rod 35 x 12	



Ref.	Weight
■ Pair of iron wheels	
IMRF330D25	7
Ø 33 cm for hubs Ø 25 cm	

