

Mower with independent cutting cells

Integral mulching mower 3 cells**TAMPRO 140M / 170M****Integral mulching mower 5 cells****TAMPRO 230M****Mower rear discharge 5 cells****TAMPRO 230EA**

Microtractor 15 - 70 HP with power grip = 540 tr/min

Independent cutting cells : *Every cutting unit is isolated in height, no interaction between the different units and better efficiency of each*

Mulching version, the entire quantity of cutting remains in cell, better crushing quality and bigger grass volume

Rear discharge version, the cut is not projected in the other cells, the air flow is not disturbed and remains constant in each cell. No blockage, uniform grass volume and air flow, importante grass height and distribution of residues is uniform without widrow formation

This position can leave a small grass strip by turning at the end of the row, overlapping in this zone necessary

Working width 140, 170, 230 cm

Floating wheel cat.1



Delivered with cardan shaft

Cutting height adjustable 2,5 - 10,5cm


Pneumatic wheel 4.10 x 3.5" (Ø30 x 10 cm)

Anti-scalping front roll

Anti-scalping front and rear wheel (TAMPRO 230M)

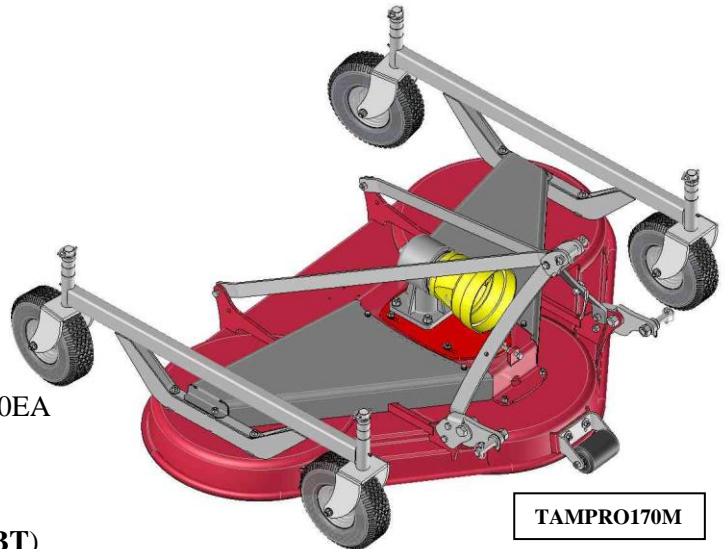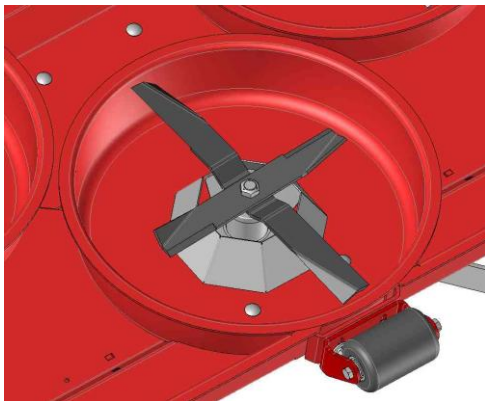
Options : Kit for front linkageMulching kit (**KMEA230**) for TAMPRO230EATorque limiter (**LCD**)Freewheel (**ROUELIB**)Iron wheel Ø280 x 80 (**KROFTAMPRO**)Angular gear box with different rotation (**KBT**)**TAMPRO170M**

The advantages of the Mulching versions:

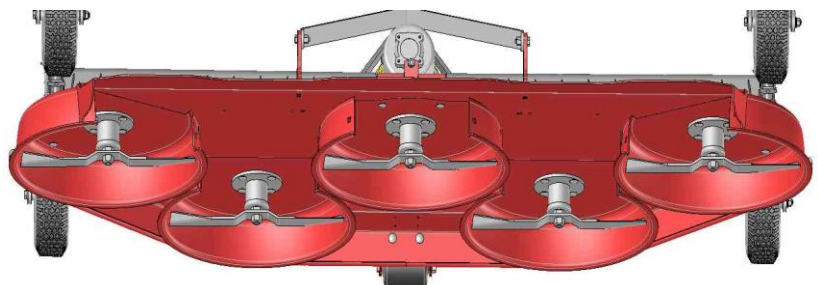Independent cutting cells**Anvil blades:** *Creation of cyclone effect and cut mixing***Deflector cone:** *Optimisation of cyclone effect de l'effet cyclone et retention des of residues in mixing zone***Anti-scalping roll:** *avoids scraping of uneven ground*

The advantages of the rear discharge versions:



Independent cutting cells**Alveolar monobloc deck thickness 4mm:** increased stiffness, reduced weight, little noise and vibrations, optimised ventilation for perfect ejection fluidity**Anti-scalping roll:** avoids scraping of uneven ground**Mulching kit:** Convertible in mulching version

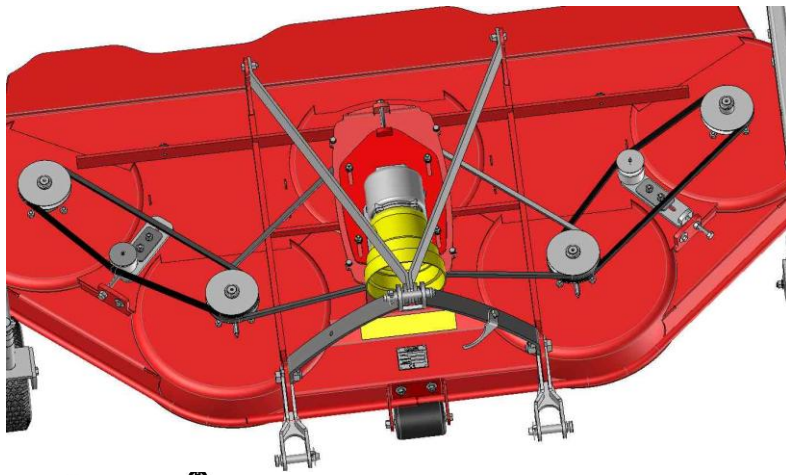



Versions « 230 EA » « 230M » :

Drive system with 4 belts : increases lifetime of the belts and lowers their warming

Floating inferior arms flottants

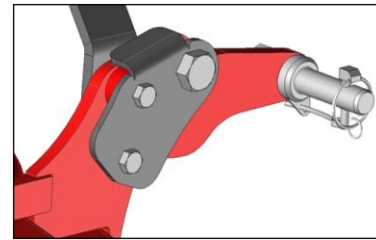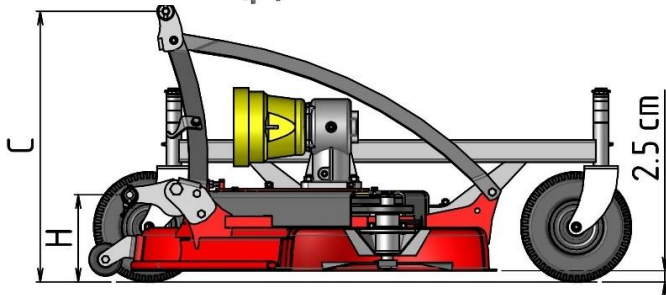

Floating arms TAMPRO 140//170

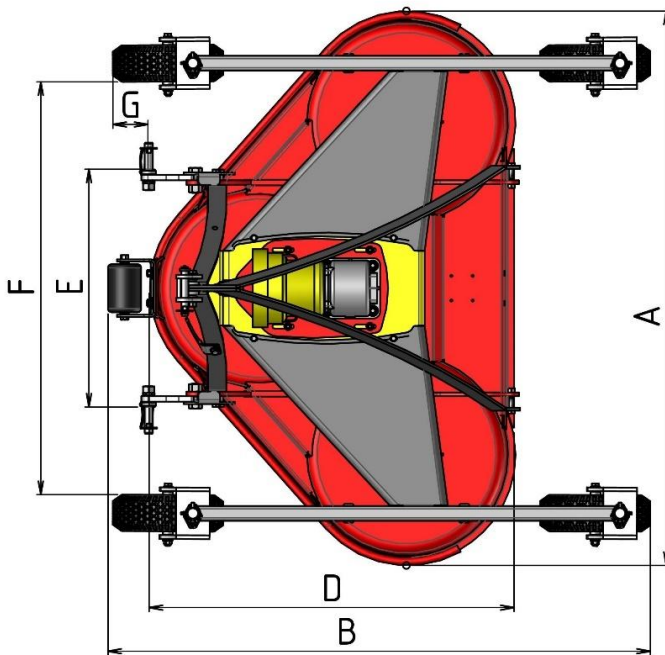

Floating arms TAMPRO230

* measurements for minimal cutting height = 2,5 cm

	CUTTING TYPE	LINKAGE	Power (HP)	Rotation speed Lames	Cutting speed (m/s)	Number of blades	Cutting height	Dimensional characteristics (cm)							Weight (Kg)	
								A	B	C*	D	E	F	G		H*
TAMPRO140M	MULCHING	REAR	15/30	2500 TR	68	3 + 3	2,5 - 10,5 cm	147	159	68	98	64	111	10	15 Mini	225
TAMPRO170M			20/40	2300 TR	70			177	167		111	74	138	3		255
TAMPRO230M			30/70	2500 TR	68	5 + 5		237	174	78	98	61	200	-5,5		340
TAMPRO230EA	REAR DISCHARGE		30/70	2500 TR	68	5	237	174	78	117	61	200	-5,5			